


SLOTTED INDENTED HEX WASHER HEAD TRI-LOBE T.R.S.

44XXXXSHWT
APRIL, 2014
REV 00
PAGE 1 of 1

Nominal Screw Length	Tolerance On Screw Length
Up To & Including 3/4"	+0 / -0.03
Over 3/4" to 1-1/2" Inclusive	+0 / -0.05
Over 1-1/2"	+0 / -0.06

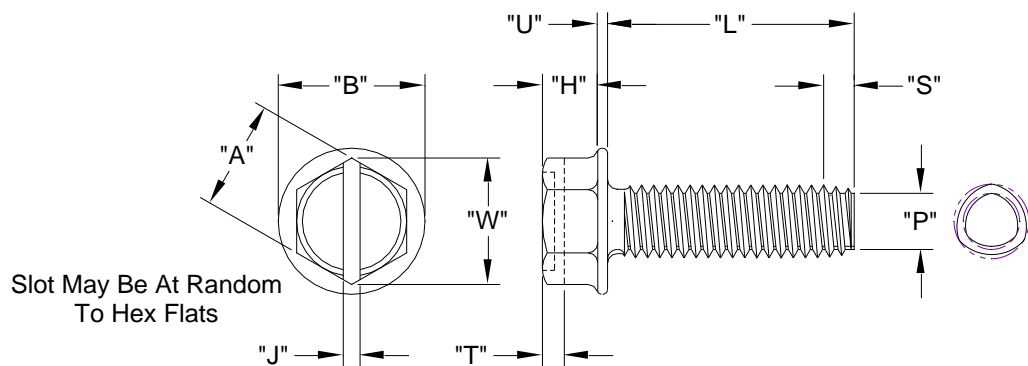

Nominal Screw Size	Basic Screw Size	"Cd"		"Dd"		"p"		"s"		"A"		"W"	"H"		"B"		"U"		"J"		"T"	
		Circumscribing Diameter		Major Diameter		Point Diameter		Point Taper Length		Width Across Flats			Head Height		Washer Diameter		Washer Thickness		Slot Width		Slot Depth	
		Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
#8 - 32	0.164	0.1670	0.1610	0.1610	0.1550	0.137	0.109	0.062	0.250	0.244	0.272	0.110	0.096	0.348	0.322	0.031	0.019	0.054	0.045	0.074	0.052	

<p>Head Standard: ASME B18.6.3 Material: 410 Stainless Steel Hardness: Rc36-43 Finish: Passivate & Wax</p>	<p>Common Uses: Increased bearing surface without adding a washer. Used in metals >60% of screw size, extruded metals, zinc die castings. NOT TO BE USED AGAINST ALUMINUM.</p>
---	---