


**UNSLOTTED INDENTED
HEX WASHER HEAD
HIGH-LOW T.F.S.**

44XXXXUHWH
APRIL, 2014
REV 00
PAGE 1 of 1

Nominal Screw Length	Tolerance On Screw Length
Up To & Including 1"	+0 / -3/64
Over 1"	+0 / -1/16

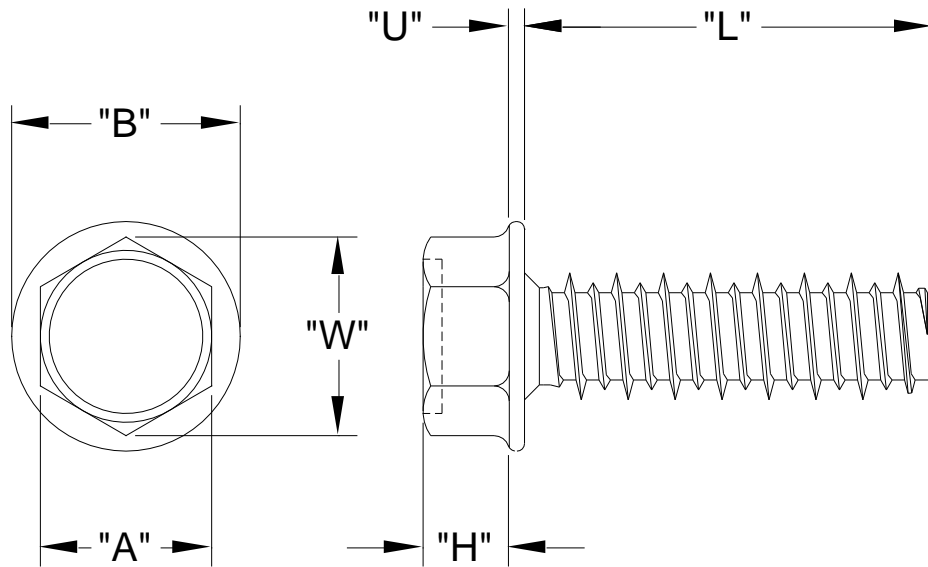

Nominal Screw Size	High Thread Diameter			Head Size	"A"		"W" Width Across Flats Min.	"H"		"B"		"U"	
	Max.	Min.	Ref.		Width Across Flats			Head Height		Washer Diameter		Washer Thickness	
					Max.	Min.		Max.	Min.	Max.	Min.	Max.	Min.
#8-18	0.170	0.160	0.130	#6	0.250	0.244	0.272	0.093	0.080	0.328	0.302	0.025	0.015
#10-16	0.195	0.185	0.145	#8	0.250	0.244	0.272	0.110	0.096	0.348	0.322	0.031	0.019

Head Standard: ASME B18.6.3 Material: 410 Stainless Steel Hardness: Rc36-43 Finish: Passivate	COMMON USES: Plastics Less Than 400,000 psi Flexural Modulus
--	---