

**TYPE 1 CROSS RECESS  
PAN HEAD  
TRI-LOBE T.R.S.**


XXXXPPTZW96

APRIL, 2016

REV 00

PAGE 1 of 1

Nominal Screw Length	Tolerance On Screw Length
Up To & Including 3/4"	+0 / -0.03
Over 3/4" to 1-1/2" Inclusive	+0 / -0.05
Over 1-1/2"	+0 / -0.06

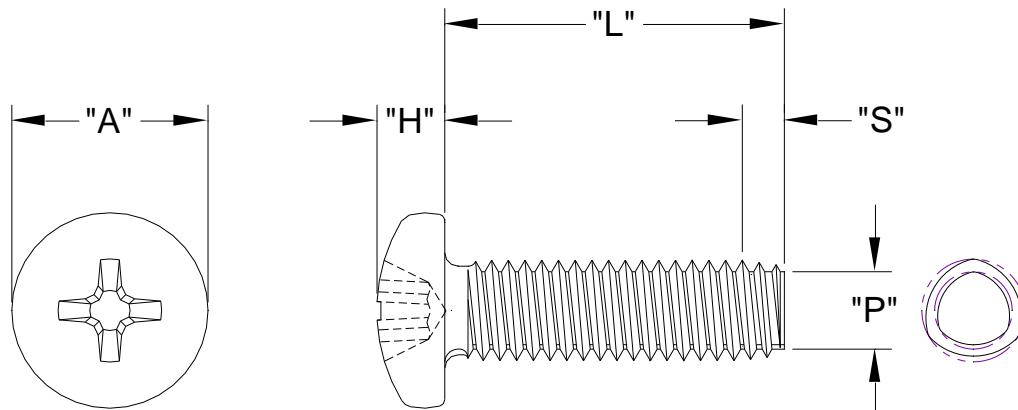

Nominal Screw Size	Basic Screw Size	"Cd"		"Dd"		"P"	"S"		Minimum Practical Screw Length	"A"		"H"		Driver Size	Recess Penetration Gaging Depth		
		Circumscribing Diameter		Major Diameter		Point Diameter	Point Taper Length			Head Diameter	Head Height		Max.	Min.	Max.	Min.	
		Max.	Min.	Max.	Min.	Max.	Max.	Min.		Max.	Min.	Max.	Min.	Max.	Min.		
#2 - 56	0.086	0.0875	0.0835	0.0840	0.0800	0.070	0.062	0.036	5/32	0.167	0.155	0.062	0.053	1	0.052	0.034	
#3 - 48	0.099	0.1010	0.0970	0.0970	0.0930	0.081	0.073	0.042	3/16	0.193	0.180	0.071	0.062	1	0.061	0.043	
#4 - 40	0.112	0.1145	0.1105	0.1095	0.1055	0.090	0.088	0.050	3/16	0.219	0.205	0.080	0.070	1	0.071	0.053	
#5 - 40	0.125	0.1275	0.1235	0.1225	0.1185	0.103	0.088	0.050	7/32	0.245	0.231	0.089	0.079	2	0.072	0.046	
#6 - 32	0.138	0.1410	0.1350	0.1350	0.1290	0.111	0.109	0.062	1/4	0.270	0.256	0.097	0.087	2	0.080	0.055	
#8 - 32	0.164	0.1670	0.1610	0.1610	0.1550	0.137	0.109	0.062	1/4	0.322	0.306	0.115	0.105	2	0.097	0.071	
#10 - 24	0.190	0.1940	0.1880	0.1860	0.1800	0.153	0.146	0.083	5/16	0.373	0.357	0.133	0.122	2	0.113	0.089	
#10 - 32	0.190	0.1930	0.1870	0.1870	0.1810	0.163	0.109	0.062	1/4	0.425	0.402	0.151	0.139	3	0.124	0.098	
#12 - 24	0.216	0.2200	0.2140	0.2120	0.2060	0.179	0.146	0.083	13/32	0.492	0.473	0.175	0.162	3	0.144	0.118	
1/4 - 20	0.250	0.2550	0.2490	0.2450	0.2390	0.206	0.175	0.100	13/32	0.615	0.594	0.218	0.203	4	0.173	0.149	
5/16 - 18	0.313	0.3180	0.3120	0.3070	0.3010	0.264	0.194	0.111	15/32								

Head Standard: ASME B18.6.4  
 Performance Standard: SAE J-81  
 Material: Carbon Steel  
 Heat Treat: Case Hardened Rc45 Min.  
 Finish: Zinc, Bake & ROHS Compliant Clear Chromate SST 96 Hr White, 120 Hr Red Plus Wax

Common Uses:  
 Most common head style; higher head height for increased strength; Used in sheet metal >60% of screw size, extruded sheet metal, zinc & aluminum die casting