


UNSLOTTED INDENTED HEX WASHER HEAD HIGH-LOW T.F.S.

XXXXUHWZ
May 2016
REV 01
PAGE 1 of 1

Nominal Screw Length	Tolerance On Screw Length
Up To & Including 1"	+0 / -3/64
Over 1"	+0 / -1/16

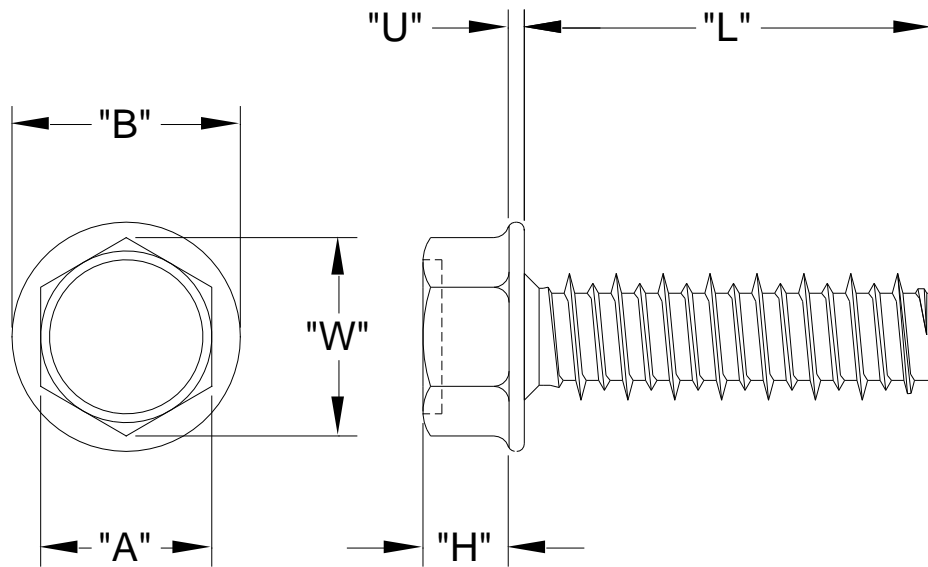

Nominal Screw Size	High Thread Diameter		Low Thread Diameter	"A" Width Across Flats		"W" Width Across Corners	"H" Head Height		"B" Washer Diameter		"U" Washer Thickness	
	Max.	Min.	Ref.	Max.	Min.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
	#6-19	0.145	0.135	0.108	0.187	0.181	0.202	0.070	0.058	0.260	0.240	0.025
#8-18	0.170	0.160	0.130	0.250	0.244	0.272	0.093	0.080	0.328	0.302	0.025	0.015
#10-16	0.195	0.185	0.145	0.250	0.244	0.272	0.110	0.096	0.348	0.322	0.031	0.019
#12-16	0.220	0.210	0.167	0.312	0.305	0.340	0.120	0.105	0.414	0.384	0.031	0.019
1/4-15	0.260	0.250	0.200	0.375	0.367	0.409	0.190	0.172	0.520	0.480	0.050	0.030
5/16-14	0.317	0.307	0.250	0.375	0.367	0.409	0.190	0.172	0.520	0.480	0.050	0.030

<p>Head Standard: ASME B18.6.3 Material: Steel Case Hardened Surface Hardness: Rc45 Min Finish: Commercial Zinc, Bake, ROHS Compliant Clear Chromate Per ASTM F1941 Code Fe/Zn 3A</p>	<p>COMMON USES: Plastics Less Than 400,000 psi Flexural Modulus</p>
---	--