




**6-LOBE (TYPE VI)  
PAN HEAD MACHINE SCREW  
w/ EXTERNAL TOOTH  
LOCKWASHER SEMS**

XXXXZPEZ
APRIL, 2014
REV 00
PAGE 1 of 1

Nominal Screw Size	#0 Thru #12	1/4 Thru 3/4
Nominal Screw Length	Tolerance On Length	
Up To & Including 1/2"	-0.02	-0.03
Over 1/2 To 1", Inclusive	-0.03	-0.03
Over 1" to 2", Inclusive	-0.06	-0.06
Over 2"	-0.09	-0.09

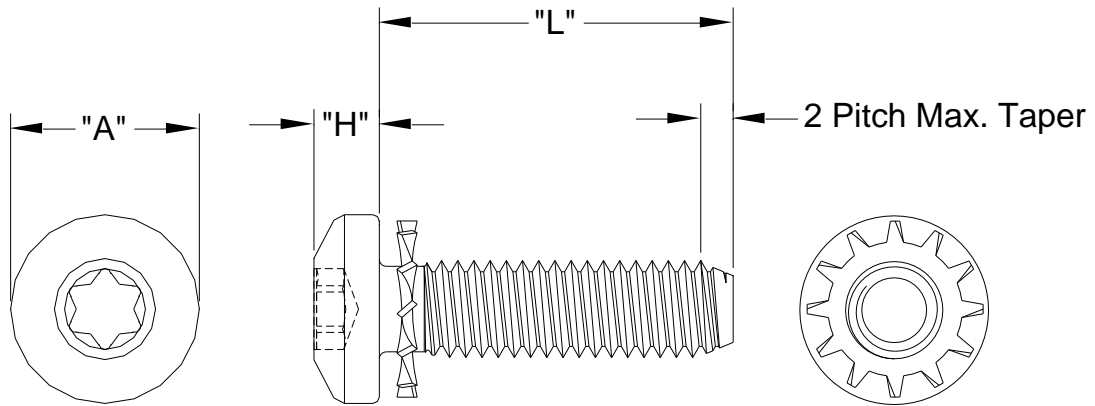

Nominal Screw Size	Basic Screw Size	Major Diameter		"A"		"H"		Driver Size	Recess Penetration Gaging Depth		Washer Diameter		Washer Thickness	
		Max.	Min.	Max.	Min.	Max.	Min.		Max.	Min.	Max.	Min.		
#4 - 40	0.112	0.1120	0.1061	0.219	0.205	0.080	0.070	10	0.045	0.035	0.230	0.220	0.018	0.012
#6 - 32	0.138	0.1380	0.1312	0.270	0.256	0.097	0.087	15	0.055	0.045	0.285	0.270	0.022	0.016
#8 - 32	0.164	0.1640	0.1571	0.322	0.306	0.115	0.105	20	0.070	0.055	0.320	0.305	0.023	0.018
#10 - 24	0.190	0.1900	0.1818	0.373	0.357	0.133	0.122	25	0.085	0.070	0.381	0.365	0.024	0.018
#10 - 32		0.1900	0.1831											
1/4 - 20	0.250	0.2500	0.2408	0.492	0.473	0.175	0.162	30	0.100	0.085	0.510	0.494	0.028	0.023

Standard: ASME B18.13 Material: Screw: Carbon Steel, 60,000 psi Minimum Tensile Stress Washer: Rc40-50 Finish: Commercial Zinc, Bake & ROHS Compliant Clear Chromate Per ASTM F1941 Code Fe/Zn 3A	<b>Common Uses:</b> Used in applications where loosening is a concern. These washers are designed to increase frictional resistance underneath the head & the mating surface. Used where marring of mating surfaces is not a concern.
---	--