


**6-LOBE (TYPE VI)  
PAN HEAD  
TRILOBULAR 48-2 T.F.S.**

XXXXZPPZ
APRIL, 2014
REV 00
PAGE 1 of 1

Nominal Screw Length	Tolerance On Screw Length
Up To & Including 3/4"	± .030
Over 3/4"	± .050

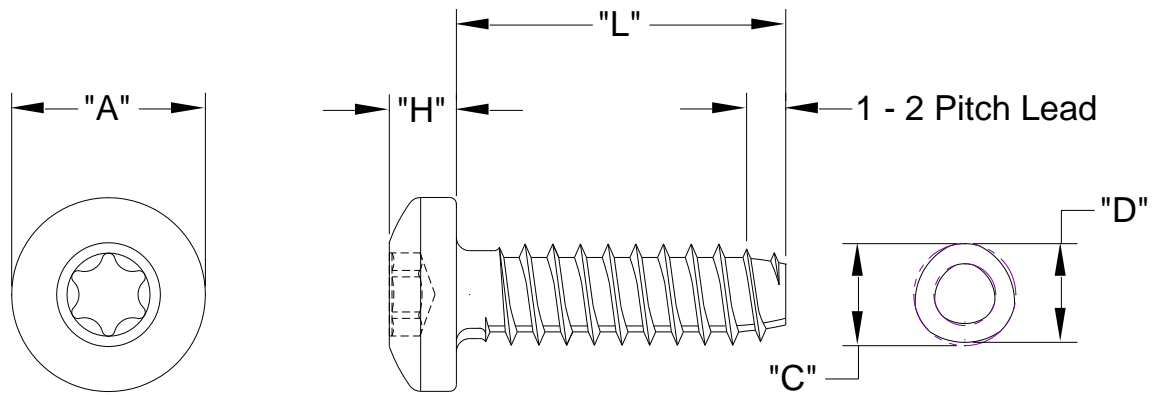

Nominal Screw Size	"C"		"D"		"A"		"H"		Driver Size	Recess Penetration Gaging Depth	
	Circumscribing Circle		Major Diameter		Head Diameter		Head Height			Max.	Min.
	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.			
#2-28	0.092	0.086	0.089	0.083	0.167	0.155	0.062	0.053	8	0.035	0.030
#4-20	0.127	0.121	0.123	0.117	0.219	0.205	0.080	0.070	10	0.045	0.035
#6-19	0.147	0.141	0.143	0.137	0.270	0.256	0.097	0.087	15	0.055	0.045
#8-16	0.185	0.179	0.179	0.173	0.322	0.306	0.115	0.105	20	0.070	0.055
#10-14	0.212	0.206	0.208	0.202	0.373	0.357	0.133	0.122	25	0.085	0.070

Head Standard: ASME B18.6.3  
 Material: Steel Case Hardened  
 Surface Hardness: Rc45 Min  
 Finish: Commercial Zinc, Bake, ROHS Compliant Clear Chromate  
 Per ASTM F1941 Code Fe/Zn 3A

**COMMON USES:**  
 Plastics  
 Less Than 800,000 psi Flexural Modulus