


LENGTH		TOLERANCE
FROM	INCLUSIVE	
3mm	6mm	± 0.375
6mm	10mm	± 0.45
10mm	18mm	± 0.55
18mm	30mm	± 0.65
30mm	50mm	± 0.8

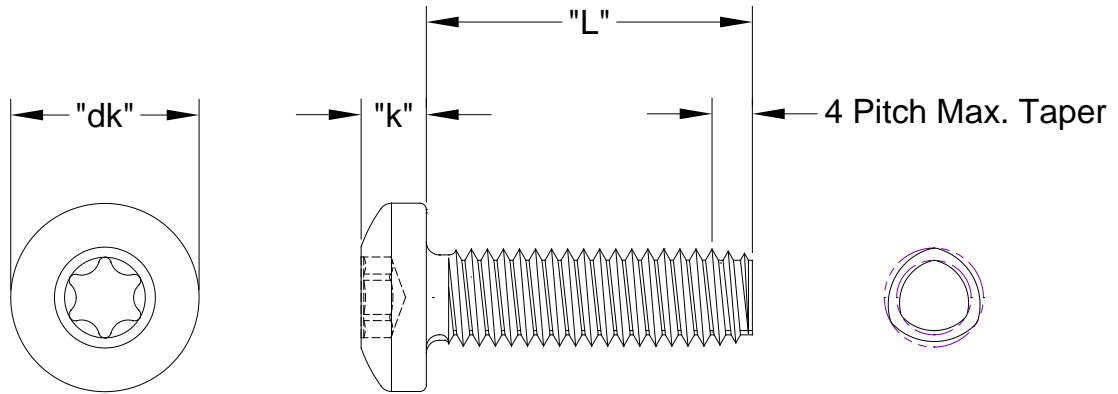

Nominal Screw Size	Tri-Lobular Body				Head Diameter		Head Height		Driver Size	Recess Penetration Gaging Depth	
	Circumscribing Circle		Major Diameter		"dk"		"k"			Max.	Min.
	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.			
M2.5 x 0.45	2.550	2.470	2.480	2.380	5.00	4.70	2.10	1.96	T-8	1.04	0.76
M3 x 0.5	3.050	2.970	2.950	2.870	5.60	5.30	2.40	2.26	T-10	1.27	0.89
M4 x 0.7	4.070	3.990	3.930	3.850	8.00	7.64	3.10	2.92	T-20	1.66	1.40
M5 x 0.8	5.080	5.000	4.920	4.840	9.50	9.14	3.70	3.52	T-25	1.91	1.78
M6 x 1.0	6.100	5.970	5.900	5.770	12.00	11.57	4.75	4.30	T-30	2.42	2.02

Standard: DIN 7500  
 Material: Steel Case Hardened  
 Surface Hardness: 450 HV 0.3 (Rc 45 Min.)  
 Finish: Zinc, Bake, ROHS Compliant Clear Chromate & Wax  
 ISO 4042 Fe/Zn 3c1A

COMMON USES:  
 Sheet Metal > 0.6 \* Screw Dia., Extruded Sheet Metal, Zinc & Aluminum Die Casting